



Typical Glazing Specification:  
 Outer - 3mm thick clear UV protected polycarbonate  
 Mid - 2mm thick clear polycarbonate  
 Inner - 2mm thick clear or diffused polycarbonate (T.B.C.)

SF15 ROOFLIGHT SPECIFICATION	
(FABRICATED FROM SELF FINISH WHITE EXTRUDED uPVC)	
Quantity of Rooflight(s)	1no
Roof Opening - Length (mm)	Dim A
Roof Opening - Width (mm)	Dim B
Kerb Ventilation?	X
Opening Frame? (Electrically operated chain motor)	✓

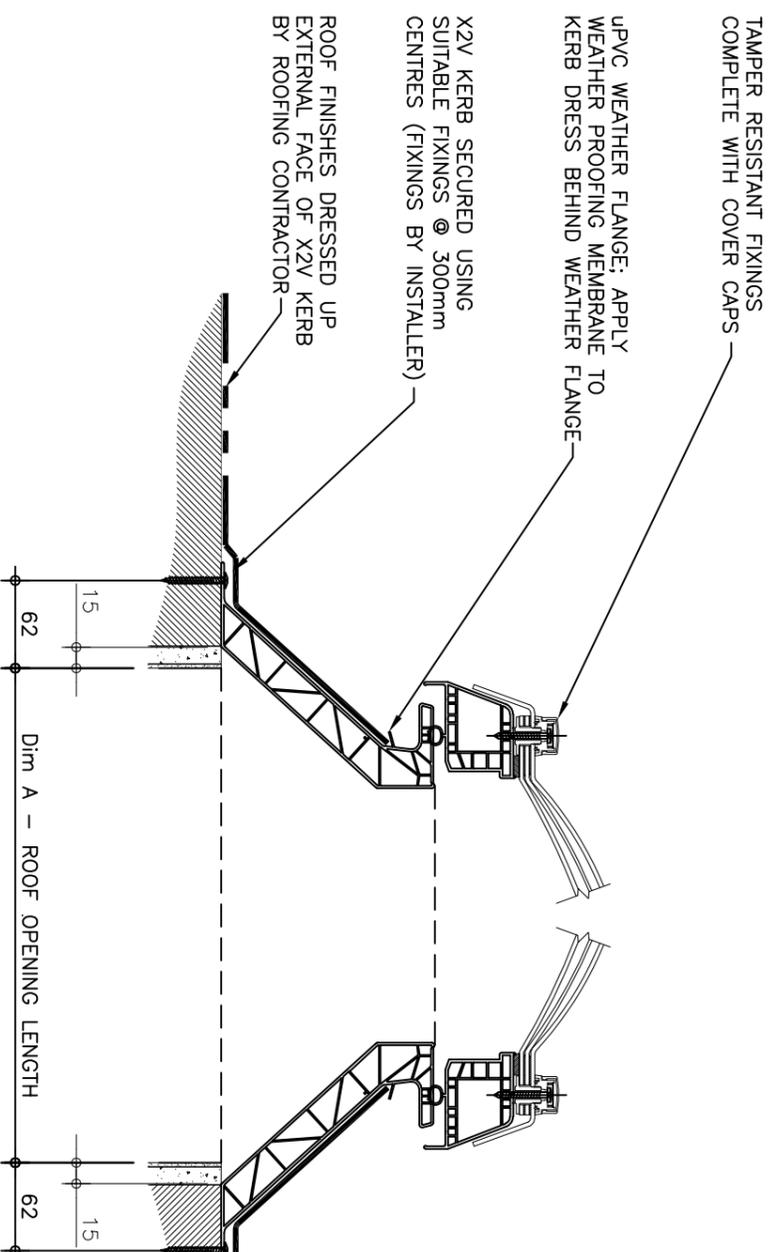

SECTION THROUGH LENGTH

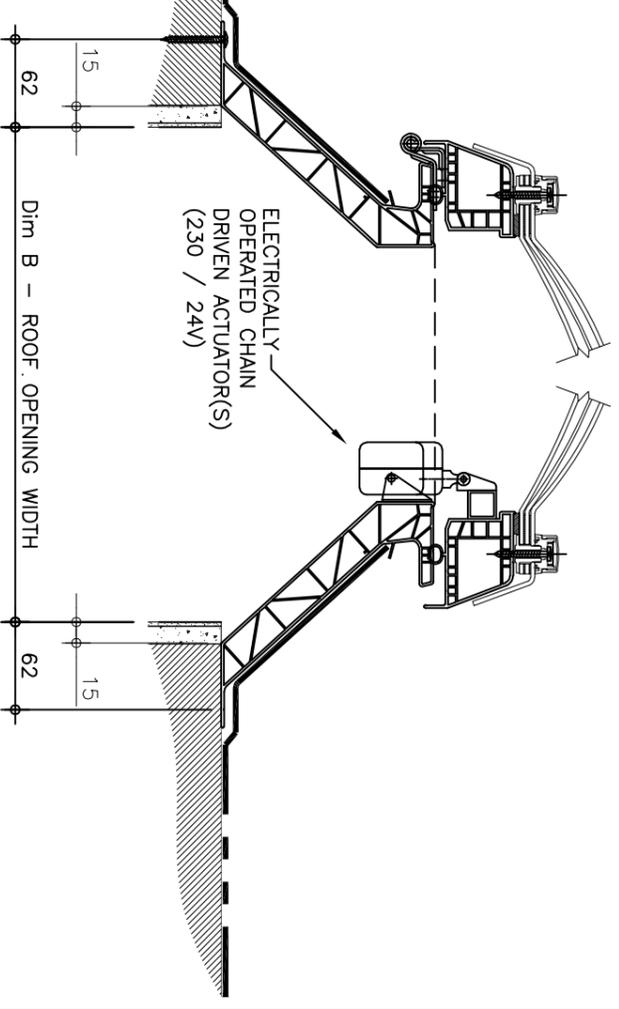

SECTION THROUGH WIDTH

REV:	DATE:	DESCRIPTION:	DRN BY
0	16.10.19	First issue of this drawing	IMW

DESCRIPTION:			
Unventilated vertical uPVC upstand fixed direct to roof, with electrically operated chain driven lifting frame and triple skin polycarbonate dome with tamper resistant fixings.			
DRAWN BY:	CREATION DATE:	CHECKED BY:	SCALE(S)
IMW	16.10.19	SS	1:5 @ A3
REVISION:		0	

DRG No. **COXDOME**  
 CD-SF15-C-06-SS

**Coxdome**  
 Unit 1, Prothero Industrial Estate, Bilport Lane, Wednesbury, West Midlands, WS10 0NT  
 Tel: 0121 530 4230 Web: www.coxdome.co.uk