



ACCESS HATCH FIXING INSTRUCTIONS

Before commencing assembly, pre-drill the base of the upstand with holes of a suitable size to accept the fixings selected to suit the roof structure. They should be positioned 30mm in from the edge of the base flange, 75mm from the corners and at approximately 300mm centres. Pre-drill the base of the upstand as above. Position the glazing assembly onto the opening frame. Ensure that clearances are even all round and fix glazing assembly to the opening frame with the self-tapping screws. Snap in the security caps. Snap on cover caps.


Access hatch - Triple Skin

TAMPER RESISTANT FIXINGS
COMPLETE WITH COVER CAPS


uPVC WEATHER FLANGE; APPLY
WEATHER PROOFING MEMBRANE TO
KERB DRESS BEHIND WEATHER FLANGE

RO16 KERB SECURED USING
SUITABLE FIXINGS @ 300mm
CENTRES (FIXINGS BY INSTALLER)

ROOF FINISHES DRESSED UP
EXTERNAL FACE OF KERB BY
ROOFING CONTRACTOR

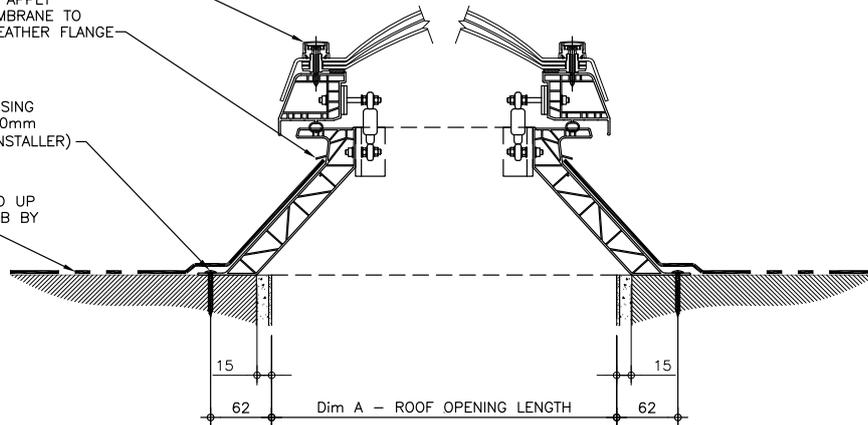

SECTION THROUGH LENGTH

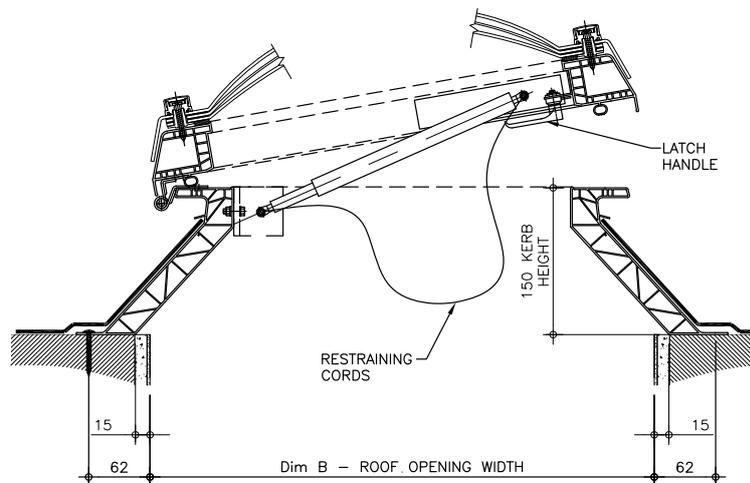

SECTION THROUGH WIDTH

COXDOME is a UK manufacturer, providing natural daylight and ventilation solutions since 1954



COXDOME part of VELUX Commercial

0121 530 4230
sales@coxdome.co.uk
www.coxdome.co.uk

Spencer Road
Blyth Riverside Business Park
Blyth, Northumberland
NE24 5TG



ACCESS HATCH FIXING INSTRUCTIONS

Access hatch - Vertical Upstand


TAMPER RESISTANT FIXINGS
COMPLETE WITH COVER CAPS

uPVC WEATHER FLANGE; APPLY
WEATHER PROOFING MEMBRANE TO
KERB DRESS BEHIND WEATHER FLANGE


R016 KERB SECURED USING
SUITABLE FIXINGS @ 300mm
CENTRES (FIXINGS BY INSTALLER)

ROOF FINISHES DRESSED UP
EXTERNAL FACE OF KERB BY
ROOFING CONTRACTOR

2No. GAS
SPRINGS

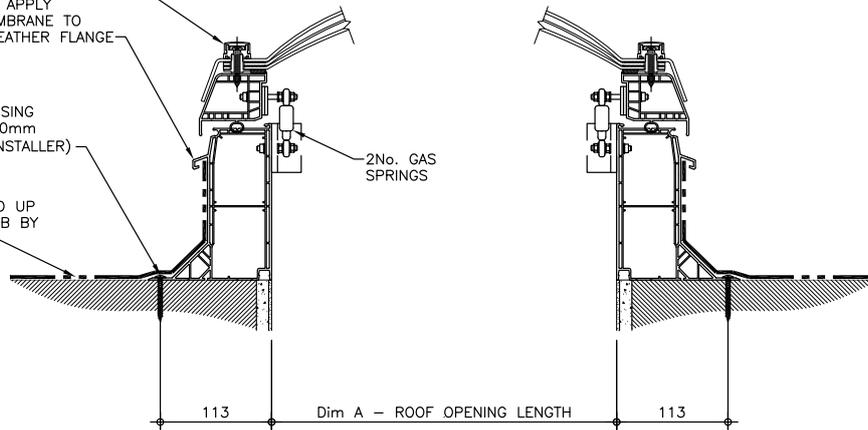

SECTION THROUGH LENGTH

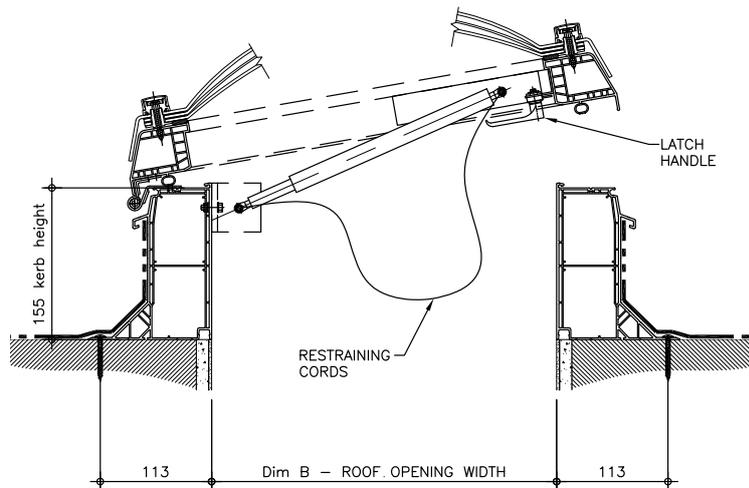

SECTION THROUGH WIDTH

COXDOME is a UK manufacturer, providing natural daylight and ventilation solutions since 1954



COXDOME part of VELUX Commercial

0121 530 4230
sales@coxdome.co.uk
www.coxdome.co.uk

Spencer Road
Blyth Riverside Business Park
Blyth, Northumberland
NE24 5TG